



GOLDSTRIKE® LED TRUNK LIGHT **WITH LIGHTSTRIKE™**

Parts Included: TRUNK LIGHT ASSEMBLY
6 CABLE TIES

Installation Instructions:

1. Park on a level surface and shut off the motorcycle. Lift the motorcycle onto its center stand if available. Ensure the engine has time to cool before installation.
2. Clean the surface where the Goldstrike LED Trunk Light installs with hot water and soap.
3. Open the saddlebags and remove side covers below the seat by pulling away from the motorcycle with steady pressure.
4. Remove the seat by removing the socket head screws under the front of the seat. Pull up on the front of the seat and slide forward.
5. Install Goldstrike P/N 48000 (sold separately). Plug in the Goldstrike Trunk Light to familiarize yourself with connector locations, the lights, and how they function. The right side has a blue wire, left side has orange. Unplug the light and set aside. FIG.6
6. Open the trunk then remove the screw near the hinge that secures the backrest pad. One screw per side. Circled in blue. FIG.1
7. Remove the trunk lid latches. Note their position for reinstallation. Circled in yellow. FIG.2
8. Remove the remaining back rest screws from inside the trunk. Then disconnect the backrest heater plug, unclip the harness and set the backrest aside. Circled in blue. FIG.2
9. Remove the six screws holding the trunk lid to the hinges. Three per side. Move the trunk lid to a workbench. Use a blanket or towel to protect the paint. FIG.3



FIG. 1

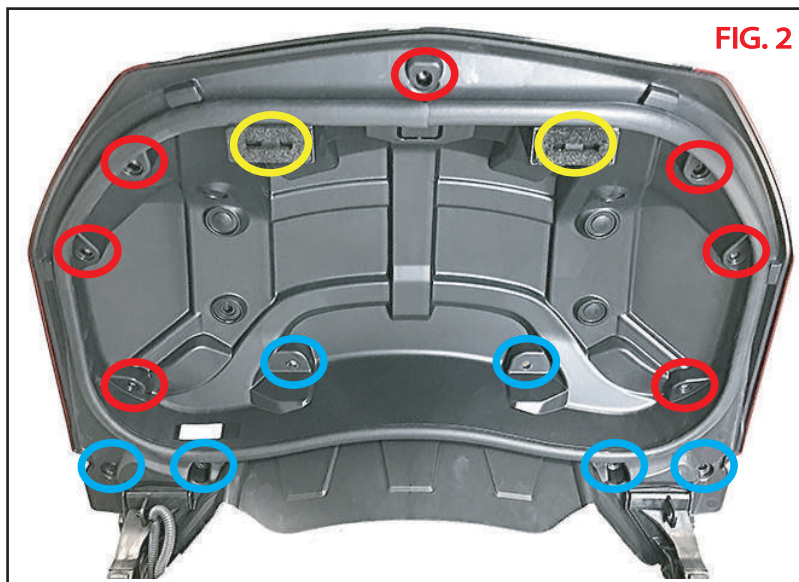


FIG. 2

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All **Ciro** products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Ciro products are designed and manufactured under very strict quality control. **Ciro** warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure.

Ciro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed and maintained. **Ciro** will not be liable for any consequential and incidental damages, including labor, or non-**Ciro** products. Please visit our website Ciro3d.com for our complete warranty policy.

10. Remove the seven remaining screws to separate the painted outer trunk lid from the inner. Set the inner aside. Circled in red. FIG.2

11. Place a piece of masking tape over the center of the outer lid. Measure 1 1/2 inch (38mm) down from the top edge and mark a horizontal line. Mark the center. FIG.4

12. Drill a small pilot hole then use a step drill to open the hole up to 9/16 inch (40mm). FIG.4

13. Clean the surface where the Trunk Light installs.

ATTENTION: Thoroughly clean the mounting surface with denatured alcohol to remove all wax, oil, and residue.

NOTE: New motorcycles are delivered from the factory covered in protective oil. Remove it before installing this product.

NOTE: Do not install if the temperature is below 50° F. The adhesive will not cure properly.

14. Insert the wires from the Goldstrike LED Trunk Light and test fit its placement. It is designed to sit 1-2mm below the top surface of the trunk lid. When you have the light in the correct location mark the edges with masking tape.

15. Peel off the adhesive backing and carefully stick the LED Trunk Light using your tape marks as a guide. Press and hold for 30 seconds.

16. Tape the wire to the the inside of the trunk lid and out the rectangular hole on the center. Reinstall the trunk lid liner and put the lid back on the motorcycle. FIG. 1-2-3

17. Route the LED Trunk Light wire along the same path as the backrest heater cable, behind the speaker grills into the under seat area. Check that the wires will not be pinched and secure it with zip ties. FIG.5

18. Plug the LED Trunk Light connectors into the Goldstrike P/N 48000 matching the color of the wire to the correct side. The right side has a blue wire, left side has orange. FIG.6

19. Test the LED Trunk Light for correct functions. run turn and brake. Reinstall the backrest, side covers and seat.

20. To use Lightstrike Technology follow the included instructions.



FIG. 3



FIG. 4



FIG.5

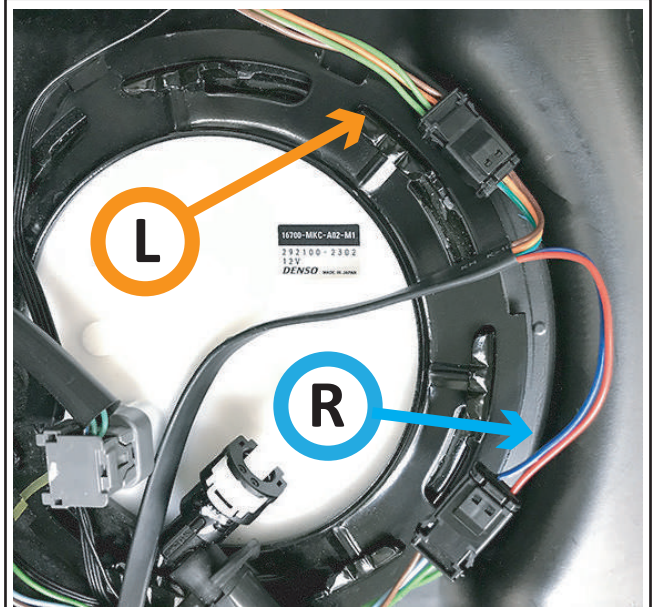


FIG.6

LIGHTSTRIKE

TECHNOLOGY™

Lightstrike Technology uses your smartphone and Bluetooth to control this product.

- 1) Download the Lightstrike app where you get your iOS or Android phone apps.
- 2) The default password is 000000 (six zeros).
- 3) For additional information and video scan the QR code.

